

PLASMA Voice is fully MIDI controllable. See SETTINGS for channel selection. Use the included Type B MIDI 3.5mm to DIN5 adapter.

| MIDI CH | Note ID | Function |
|--------------|---------------------|--|
| CH1-7 | 7-137 (G-2 - G8) | Plays note at MIDI note pitch, responds to velocity, PITCH SLIDER, PITCH CV, OCTAVE and MASTER OCTAVE all offset the MIDI note |
| CH1-7 & CH10 | 0-6 (C-2 - F#-2) | Temporarily changes ACCENT mode (1-7) and triggers ACCENT |
| CH10 | 35-83 (B0 - B4) | General MIDI Percussion SOUNDS 1-49 mapped to notes 35-83. Responds to velocity |

| MIDI PC MAP | PC Messages |
|-------------|---|
| | are received on the selected CH1-7 and CH10 |
| Message | Function |
| 1-49 | Select SOUNDS 1-49 |
| 61-65 | Select TRIGGER mode 1-5 |
| 66-67 | Select PITCH CV response Track/Hold |
| 71-77 | Select ACCENT mode 1-7 |
| 81-87 | Select MULTICV assignment 1-7 |
| 91-102 | Select CENTER NOTE C-B |
| 111-117 | Select MASTER OCTAVE OFFSET +/-3 |
| 121-124 | Select FILTER mode 1-4 |

WARNING!

NEVER operate the PLASMA VOICE near water or on outdoor stages in rainy conditions. DO NOT play your PLASMA VOICE in the shower!

The XENON Tubes contained within the PLASMA VOICE will run an estimated 10 000 hours - in case of a broken tube or faulty unit, please contact your PLASMA VOICE dealer or info@gamechangeraudio.com. For all other inquiries, please reach out to Gamechanger Audio.

Gamechanger Audio will not be liable for any injury, material damage, or any other loss, caused by the incorrect operation of PLASMA VOICE, or breach of the warnings and instructions laid out in this manual.

WARRANTY & RETURNS

You have a 30 day return period when you may return the product and receive a full refund. You will only be responsible for return shipping charges.

Each PLASMA Voice manufactured by Gamechanger Audio is warranted to be free from defects in materials and workmanship for one year from the date of shipping or longer if required by the relevant legislation. This warranty does not apply to any unit which in the opinion of the manufacturer has been used improperly or has been mechanically or otherwise damaged by accident, misuse or negligence or has been altered or repaired in such a way to impair performance, nor shall it apply to cosmetic defects (considered normal wear and tear).

Other parts, such as knobs, rubbers, cable connectors, are non-replaceable. The manufacturer reserves the right to make changes in design or construction of this equipment without obligation to install similar changes in equipment already sold.


FOR THE US:

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with these instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- reorient or relocate the receiving antenna.
- increase the separation between the equipment and receiver.
- connect equipment into an outlet or a circuit different from that to which the receiver is connected.
- consult the dealer or an experienced radio / TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Unauthorized changes or modifications to this system can void the user's Authority to operate this equipment. This equipment requires shielded interface cables in order to meet FCC Class B limit.

PLASMA VOICE USER MANUAL

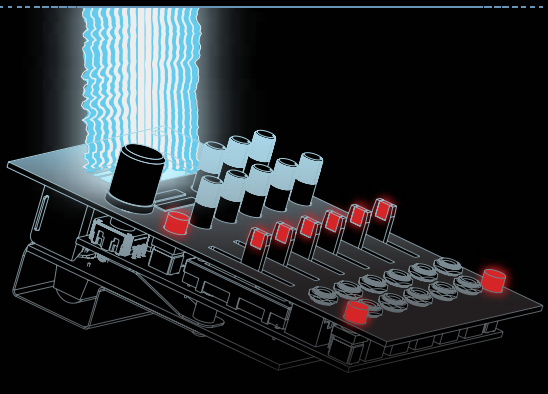

The PLASMA Voice is a unique synthesizer module that creates sound by sending electrical current between two electrodes in a xenon-filled gas tube. The high-voltage discharges are converted into analog audio signal using a specially designed electromagnetic rectifier circuit. The resulting output is a diverse range of electrifying tones that perfectly capture the character and intensity of the vibrant blue electrical arc.

The PLASMA Voice utilizes a multitude of complex digital algorithms to modulate various discharge parameters of the plasma tube and the high-voltage current transformer. These algorithms are organized as 49 transformable SOUNDS across 7 stylistic BANKS, each offering a distinct character and a unique set of electrical sound properties that can be further shaped and modulated with 6 performance sliders & CV inputs.

The module's true power lies in its ability to profoundly modify each SOUND beyond recognition - shifting across 7 octaves will deeply alter the character of each SOUND, not merely its pitch, and adjusting the analog EQ & DRIVE section will make a radical change in the final output. There is a variety of powerful accent modes that allow you to elevate a simple sequence into a dynamic performance with just a basic trigger generator. Furthermore, the module's oscillator and looping trigger modes let you transform each SOUND into a powerful high-voltage engine with a fully controllable analog VCA & VCF.

| CC | PARAMETER | MSB VALUES |
|----|------------------------|-------------------|
| 1 | MODWHEEL | 0-127 = MIN - MAX |
| 8 | PITCH slider | |
| 9 | TIME slider | |
| 10 | MOD slider | |
| 11 | HARM slider | |
| 12 | FLUX slider | |
| 13 | FILTER slider | 0-64 |
| 14 | TIME CV Attenuverter | MIN - CENTER |
| 15 | MOD CV Attenuverter | |
| 16 | HARM CV Attenuverter | 65 - 127 |
| 17 | FLUX CV Attenuverter | CENTER - MAX |
| 18 | FILTER CV Attenuverter | |
| 19 | FINE TUNE cents | |
| 20 | ACCENT TIME | |
| 21 | ACCENT LEVEL | |
| 22 | ACCENT SHAPE | |
| 23 | MULTICV Attenuverter | |
| 24 | FILTER RESONANCE | 0-127 = MIN - MAX |

FOR EUROPE: This product complies with the requirements of Electromagnetic Compatibility Directive 2014 / 30 / EU.

FOR CANADA: NOTICE: This class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations. Avis: cet appareil numérique de la classe B respecte tous les exigences du règlement sur le matériel brouilleur du Canada.

GAMECHANGER AUDIO
TOMSONA STREET 33A-32
RIGA, LV-1013
LATVIA
INFO@GAMECHANGERAUDIO.COM
WWW.GAMECHANGERAUDIO.COM
+1202 407 9741

CE, RoHS, FC, and other certification logos.

REVISION 2.1

SETTINGS

1 TRIGGER INPUT MODES

There are 5 different main TRIG button and input functionality options mapped to values 1-5. The last two values 6 & 7 are accessible via repeated ENCODER press. These values determine the response to pitch CV when there are no triggers or the gate is off.

| TRIG RESPONSE | GATE RESPONSE | GATE | ENVELOPE |
|-----------------------------|---|--|--|
| 1:1 TRIG 1 2 3 4 5 6 7 | Triggers SOUND on rising edge | | |
| 1:2 GATE 1 2 3 4 5 6 7 | Triggers SOUND on rising edge | Gate on: triggers SOUND and holds in sustain point Gate off: starts release | |
| 1:3 LOOP 1 2 3 4 5 6 7 | Triggers SOUND on rising edge | Loops SOUND Loop length dependent on TIME slider | |
| 1:4 OSC 1 2 3 4 5 6 7 | Always ON mode. Envelopes hold in sustain point Re-trigger SOUND on rising edge | | |
| 1:5 ON/OFF 1 2 3 4 5 6 7 | Rising edge toggles between ON/OFF modes While ON envelopes are latched in sustain | | |
| PITCH CV RESPONSE | 1:6 TRACK Always track the CV at 1v/oct INPUT | 1:7 HOLD Hold pitch during no triggers / gate off. | This does not affect MULTICV if assigned to PITCH. |

2 ACCENT MODES

There are 7 different ACCENT input functionality modes. Each of them has different parameters mapped to the ALT SLIDER functions and almost all of them have different responses to trigger and gate signals

| TRIG RESPONSE | GATE RESPONSE | ACC TIME SLIDER | ACC LVL SLIDER | ACC SHAPE SLIDER |
|-------------------------------|--|----------------------|--|--|
| 2:1 ACCENT 1 2 3 4 5 6 7 | SOUND ALT parameters. | | | |
| 2:2 DUCK 1 2 3 4 5 6 7 | Gate on: ducks and holds | Ducking release time | Ducking depth | Ducking release shape -1=log +1=exp |
| 2:3 STARVE 1 2 3 4 5 6 7 | Gate on: ducks and holds Gate off: starts ducking release | Starve release time | Starve depth | Starve release stutter |
| 2:4 CVFREEZE 1 2 3 4 5 6 7 | Gate on: samples and holds all CV inputs Gate off: releases (slews) | Release time | Sample scale 0x-1x | Release slope 0 = hold w/o release -1=log +1=exp |
| 2:5 JUMP 1 2 3 4 5 6 7 | Gate on: Triggers and holds pitch jump Gate off: starts release | Release time | Interval MAX=3 oct up MIN=3 oct down | Pitch jump shape -1=log +1=exp |
| 2:6 REVERSE 1 2 3 4 5 6 7 | Gate on: reverses and triggers envelopes and holds in sustain point. Gate off: starts release | Reverse SOUND time | Tube driver envelope start position | Output envelope start position |
| 2:7 BURST 1 2 3 4 5 6 7 | Gate on: continuous repeated triggers Gate off: trigger burst decay | Burst time | Burst rate | Burst ramp up / down |

SETTINGS

3 MULTICV INPUT ASSIGN

The MULTICV input can be assigned to any of the SLIDERS as an additional summed CV input or to SOUND / BANK selection. In case of SOUND/BANK selection incoming CV scans through SOUNDS spanning all BANKS. SOUND selection is quantized to the major scale - each white key corresponds to one SOUND, IV input corresponds to 1 BANK.

ALT + FLUX / MULTICV SLIDER is used as an attenuverter for MULTICV.

| | | | | | | |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| 3:1 1 2 3 4 5 6 7 | 3:2 1 2 3 4 5 6 7 | 3:3 1 2 3 4 5 6 7 | 3:4 1 2 3 4 5 6 7 | 3:5 1 2 3 4 5 6 7 | 3:6 1 2 3 4 5 6 7 | 3:7 1 2 3 4 5 6 7 |
| 1V/OCT | TIME CV | MOD CV | HARM | FLUX CV | FILTER | BANK & SOUND |

4 MIDI INPUT CHANNEL SELECT

Selectable MIDI channel for receiving notes, velocity, pitch & mod wheels, PC, CC and SysEx. Regardless of the selected MIDI CHANNEL the module accepts General Percussion Key Map on Channel 10.

| | | | | | | |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| CH1 1 2 3 4 5 6 7 | CH2 1 2 3 4 5 6 7 | CH3 1 2 3 4 5 6 7 | CH4 1 2 3 4 5 6 7 | CH5 1 2 3 4 5 6 7 | CH6 1 2 3 4 5 6 7 | CH7 1 2 3 4 5 6 7 |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|

5 CENTER NOTE TUNE

Selectable note for 0V PITCH CV input and TUNE slider in center indent position. Primarily used for aligning with the base pitch of chosen CV sequencer / controller. Note: 12 values instead of the usual 7.

| | | | | |
|---------------------|---------------------|---------------------|---------------------|---------------------|
| C# 1 2 3 4 5 6 7 | D# 1 2 3 4 5 6 7 | F# 1 2 3 4 5 6 7 | G# 1 2 3 4 5 6 7 | A# 1 2 3 4 5 6 7 |
| C 1 2 3 4 5 6 7 | D 1 2 3 4 5 6 7 | E 1 2 3 4 5 6 7 | F 1 2 3 4 5 6 7 | G 1 2 3 4 5 6 7 |
| A 1 2 3 4 5 6 7 | B 1 2 3 4 5 6 7 | | | |

6 MASTER OCTAVE OFFSET

| | | | | | | |
|---------------------|---------------------|---------------------|--------------------|---------------------|---------------------|---------------------|
| -3 1 2 3 4 5 6 7 | -2 1 2 3 4 5 6 7 | -1 1 2 3 4 5 6 7 | 0 1 2 3 4 5 6 7 | +1 1 2 3 4 5 6 7 | +2 1 2 3 4 5 6 7 | +3 1 2 3 4 5 6 7 |
|---------------------|---------------------|---------------------|--------------------|---------------------|---------------------|---------------------|

7 FILTER MODE SELECT

Selectable master FILTER mode and FILTER SLIDER behavior.

| | FILTER TYPE | SLIDER center indent | SLIDER downward | SLIDER upward |
|------------------------------|---------------------------------|---|--|--|
| 7:1 DEFAULT 1 2 3 4 5 6 7 | Defined by the selected SOUND | | | |
| 7:2 LP 1 2 3 4 5 6 7 | Low pass | Open FILTER (Max cutoff frequency) | Close FILTER (Reduce cutoff frequency) | Close FILTER and add Decay envelope modulation |
| 7:3 HP 1 2 3 4 5 6 7 | High pass | Open FILTER (Min cutoff frequency) | Close FILTER (Increase cutoff frequency) | Close FILTER and add Decay envelope modulation |
| 7:4 LP / HP 1 2 3 4 5 6 7 | Low pass / high pass (DJ style) | Open FILTER (Max low pass and min high pass cutoff frequencies) | Close high pass FILTER | Close low pass FILTER |

LED ROWS & ENCODER

Two 7:7 LED indicator rows controlled by the ENCODER. Push to switch rows, turn to select values 1-7.

Top row: BANK select 1-7
Bottom row: SOUND select 1-7

ALT top row: octave 1-7
ALT bottom row: master CV input attenuation 1(full) - 7 (none)

The ENCODER and LED rows are also used to browse SETTINGS.

ALT BUTTON

Hold ALT for the ENCODER and SLIDER alternative functions.

PITCH SLIDER

Center indented pitch control, +/- 1 octave

0V pitch CV at center indent produces note C (adjustable in SETTINGS).

ALT: Fine tune, +/- 1 semitone

TIME SLIDER

Each SOUND has a unique envelope shape. The TIME slider time-stretches it. Center indent produces the optimal time based on the selected SOUND.

The TIME slider also affects the FILTER decay envelope time.

The envelope behavior is dependent on the selected TRIGGER and ACCENT modes.

ALT: ACCENT envelope time

1V/OCT PITCH CV INPUT +/- 10V

TRIG INPUT & TRIGGER BUTTON

Main trigger / gate input
Rising edge detection & min 2V

Multiple TRIGGER & GATE modes:
1 TRIGGER, 2 GATE, 3 LOOP,
4 OSCILLATE, 5 ON/OFF

ACC INPUT

ACCENT trigger / gate input
Rising edge detection & min 2V

Multiple ACCENT modes are available:
1 ACCENT, 2 DUCK, 3 STARVE, 4 CVFREEZE, 5 JUMP,
6 REVERSE, 7 BURST

ACCENT is also controlled by ALT+ACC TIME, ALT+ACC LVL & ALT+ACC SHAPE sliders.

MULTICV INPUT

Assignable CV input, +/- 5V
Default assignment to BANK & SOUND selection

Alternatively, MULTICV can be assigned as an additional CV input to any of the 6 SLIDERS.

ALT+MULTICV slider works as an attenuverter

The PLASMA tube's driver is controlled by a sophisticated digital engine. This engine consists of multiple one-shot and looping waveforms, as well as envelopes that modulate both the waveforms and the tube driver itself. Each SOUND defines these internal modulation paths to achieve the desired musical effect.

The SOUNDS are organized in BANKS:
1 BASS 2 LEAD 3 PLUCK 4 DRUM
5 METAL 6 STATIC 7 SPARK

The SLIDERS allow you to modify each SOUND.

DRIVE & EQ KNOBS
Soft-clipping and tilt EQ section between the TUBE and FILTER.

DRIVE: max CCW for unity gain.

BASS & TREB: cut/boost, center indent for flat response.

CV ATTENUVERTERS

Each one corresponds to the CV input below the SLIDER.

Center: complete attenuation
Max CW: no attenuation
Max CCW: inverted

FILTER SLIDER

FILTER cutoff frequency and FILTER envelope control.

Center indent: fully open FILTER
Down: close the FILTER
Up: close the FILTER and add decay envelope based on the TIME slider setting.

See SETTINGS to switch between low pass / high pass.
ALT: RESONANCE amount 0-1

MOD, HARM & FLUX SLIDERS

The digital engine that controls the TUBE driver consists of complex modulation paths.

For each SOUND the three most useful modulations are assigned to the MOD, HARM & FLUX sliders based on the musical effect.


The center indented position for the suggested starting sound.

MOD slider:
pitch-mod type effect depth
ALT: ACCENT LEVEL 0 - 2x

HARM slider:
harmonic content effect depth
ALT: ACCENT SHAPE

FLUX slider:
chaos artifact effect depth
ALT: MULTICV ATTENUVERTER +/- 1

CV INPUTS FOR TIME, MOD, HARM, FLUX & FILTER
+/- 5V from center indent

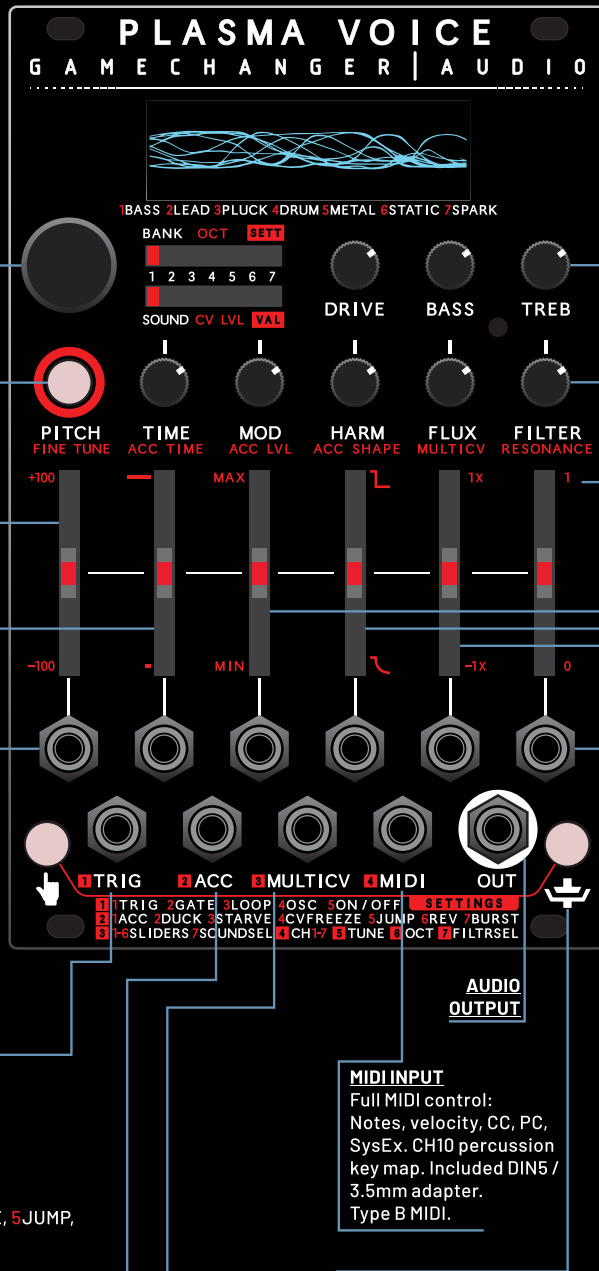

MIDI INPUT

Full MIDI control:
Notes, velocity, CC, PC, SysEx. CH10 percussion key map. Included DIN5 / 3.5mm adapter. Type B MIDI.

CLUTCH BUTTON

The CLUTCH button acts as a temporary parameter editing buffer for creating timed and sharp parameter transitions, including BANK & SOUND selection, SLIDERS, ATTENUVERTERS, ALT and SETTINGS functions.

Press and hold CLUTCH to delay all real-time parameter changes and apply them by releasing CLUTCH

SPECS

Width: 16HP
Depth: 35mm
+12V: 220 mA
-12V: 35 mA
+5V: 0
Output: +/- 8V max

SETTINGS

Press TRIGGER and CLUTCH at the same time to enter the SETTINGS mode (indicated by blinking ALT button and LED rows).

To exit press ALT.

Use the ENCODER to navigate the SETTINGS menu as indicated by the LED rows. Push the ENCODER to switch rows and turn the ENCODER to select values 1-7. The top row indicates the selected parameter and the bottom row indicates the parameter value.

